



GESTRA® Steam Traps · Product Range Group A1

UNA-SPECIAL PN 25

Float Trap UNA-SPECIAL PN 25 DN 50 and 65 mm (2 and 2½")

Description

Float trap with slide-valve closing mechanism for all operating conditions, also for draining gas or compressed-air lines, and for the discharge of other cold condensates or distillates.

With Simplex control (without thermostatic element) and hand-vent valve, alternatively with Duplex control (thermostatic element for automatic air venting – only suitable for the discharge of steam condensate).


The slide valve is operated by the float as a function of the condensate level in the trap and in addition by the Duplex control (when fitted) as a function of the temperature. The condensate formed is immediately discharged. Within the operating range of the trap, condensate banking-up and live-steam loss are avoided.

Pressure/Temperature Rating				
PMA (Maximum allowable pressure)	[barg]	25	17	13
	[psig]	360	245	185
TMA (Maximum allowable temperature)	[°C]	120	300	400
	[°F]	248	572	752
Δ PMX (Maximum differential pressure) (inlet pressure minus outlet pressure)		22 bar (320 psi)		


Materials	DIN reference	ASTM equivalent
Body and cover	GP 240 GH (1.0619)	A 216 WCB
Seat	X46 Cr 13 (1.4034)	SAE 51420 F
Slide valve	X20 Cr 13 (1.4021)	A 182 F 6
Ball float	X5 CrNi 1810 (1.4301)	A 182 F 304
Thermostatic element	Corrosion-resistant S.S. bimetal	

Connections

Flanges: DIN (BS 4504) PN 25

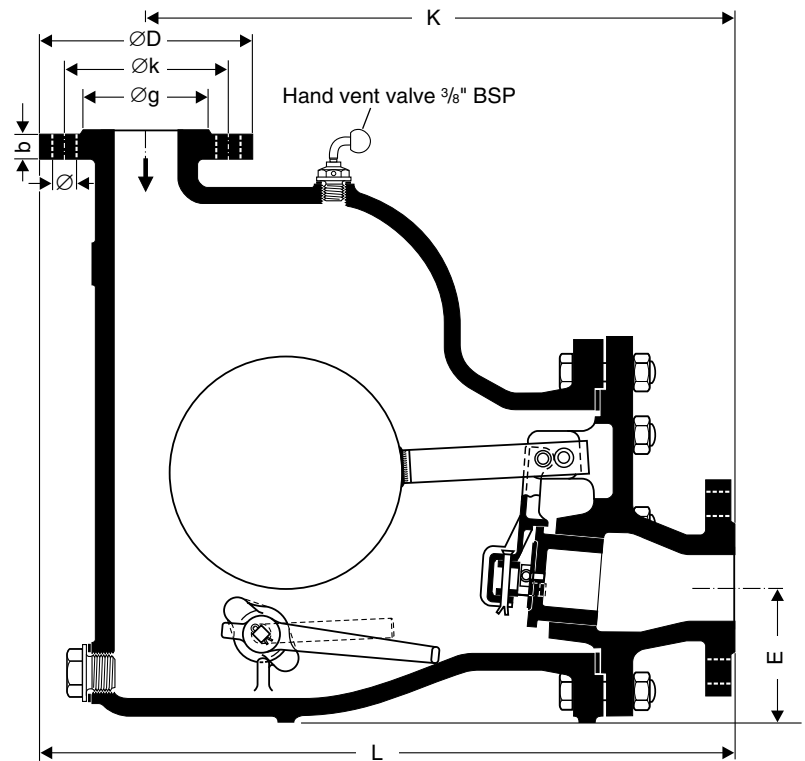

Simplex design (with hand vent valve and float lifting lever)

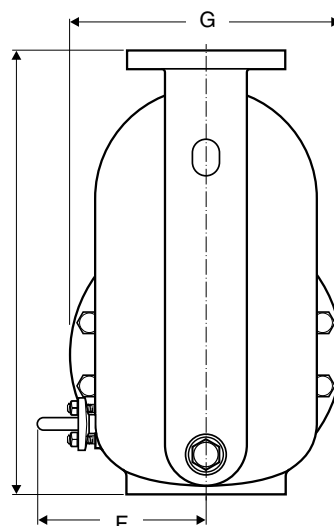

Duplex design (with thermostat)

Dimension and Weights

DN [mm]	[in]	Dimensions [mm]						Flange dimensions [mm]					Number of bolts	Approx. weight [kg]
		L	H	G	K	E	F	D	k	l	b	g		
50	2	527	445	290	445	100	185	165	125	18	20	102	4	68
65	2½	563	500	310	470	105	190	185	145	18	22	122	8	82
80	3	see data sheet UNA, PN 25												
100	4	see data sheet UNA, PN 25												

Float Trap UNA-SPECIAL PN 25 DN 50 and 65 mm (2 and 2 1/2")

Capacity Chart

The chart shows the maximum capacities of hot condensate for the range of orifices (O) and sizes available. The cold water capacities are: Capacity of hot condensate multiplied by factor F.


The capacities are dependent on the differential pressure (working pressure). The differential pressure is the difference between inlet and outlet pressures and depends among other things on the run of the pipeline. If the condensate downstream of the traps is lifted, the differential pressure (working pressure) is reduced by approximately 1 bar for 7 m (or 2 psi for 3 feet) in lift.

The maximum admissible differential pressure is dependent on the cross-sectional area of the orifice.


The standard design of the trap is available for a maximum differential pressure of 22 bar (320 psi).

If, however, larger capacities are required, special orifices are available for differential pressures of:

- 16 bar (230 psi) – for all valve sizes
- 10 bar (145 psi) – for all valve sizes
- 5 bar (70 psi) – for all valve sizes
- 3.5 bar (50 psi) – for valve size DN 50 mm (2")
- 2 bar (30 psi) – for valve size DN 65 mm (2 1/2")

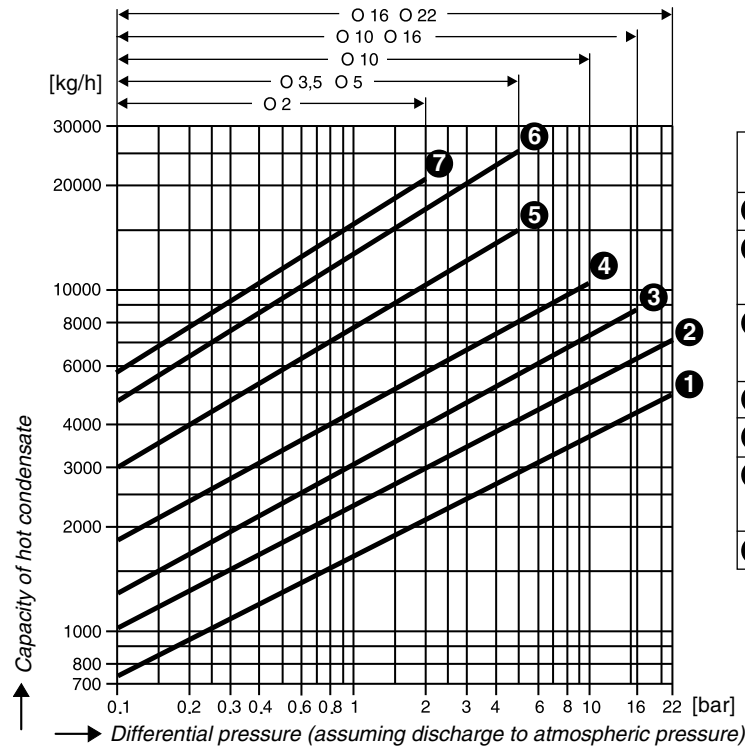

Available orifices	
1	DN 50 O 22
2	DN 50 O 16
	DN 65 O 22
3	DN 50 O 10
	DN 65 O 16
4	DN 65 O 10
5	DN 50 O 5
6	DN 50 O 3.5
	DN 65 O 5
7	DN 65 O 2

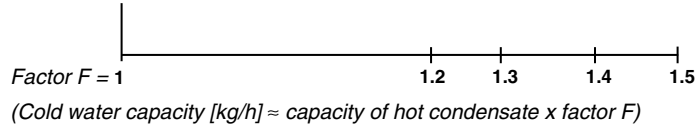

When ordering please state:


Inlet pressure, outlet pressure, quantity of condensate to be discharged, design, size and desired orifice, position of the trap and details of application.

The following test certificates can be issued on request, at extra cost:
In accordance with EN 10204/2.2 and -3.1 B.

All inspection requirements have to be stated with the order. After supply of the equipment certification cannot be established. For tests and inspection charges please consult us.

Supply in accordance with our general terms of business.

Technical modifications reserved.

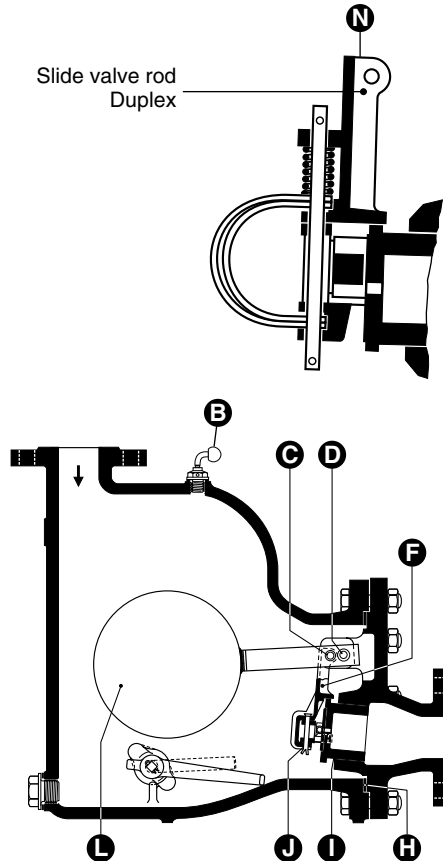

Spare Parts

Item N°	Designation	Order N°	
		DN 50 mm	DN 65 mm
I	Seat	O 2	210311
		O 3.5	210325
		O 5	210324 210325
		O 10	210336 210337
		O 16	210351 210336
		O 22	208702 210351
		J	Slide valve
O 3.5	210372		
O 5	210371 210372		
O 10	210383 210384		
O 16	210395 210383		
O 22	209547 210395		
C	Bolt	210463	210463
D	Bolt	210277	210281
L	Ball float	210452	210453
H	Cover gasket	221472	221423
N	Slide valve rod (Duplex) with thermostatic element	221690	221690
F	Slide valve rod (Simplex)	200840	200840
B	Vent valve (with gasket)	560058	560058



GESTRA AG

P. O. Box 10 54 60, D-28054 Bremen
Münchener Str. 77, D-28215 Bremen

Telephone +49 (0) 421 35 03-0, Fax +49 (0) 421 35 03-393

E-Mail gestra.ag@flowserve.com, Internet www.gestra.de



Flow Control Division