

02 – 07.8

05.15.GB

**Spring loaded full lift safety valve
flanged, with closed bonnet
Series PV63**



Series PV 63



Spring loaded full lift safety valve flanged, with closed bonnet

Application

The safety valve Series PV 63 is certified as Safety device for protection against excessive pressure according to EN ISO 4126-1 standard. The valve is determined for steam, air, water and other gases and liquids. Chemical composition of medium must be in accordance with material of valve's body and inner parts. Working temperature range is from +5°C to +400°C, if the temperature is higher than +350°C, the execution with cooling spacer is recommended.

In case of higher seat tightness demand, the disc with soft sealing (EPDM, NBR) is recommended. This execution is limited by max. temperature +120°C.

If the protected medium is liquid, the valve is, regarding the reliable function, offered either as the valve with limited lift (and reduced value of certified coefficient of discharge K_{dr} , see tables page 8) or as the full lift valve with soft seat and diaphragm (for PN16 and PN40 only). The value of certified coefficient of discharge K_{dr} is higher, than in previous version, but this one is limited by size (DN 20x32 to 100x150), maximal temperature of medium +120°C and maximal value of set pressure p_{set} 10 barg.

Possible combinations (execution, seat material...) see relevant tables and type number specification.

The valve's discharge capacity, based on the data given in this sheet (A_0 , K_{dr}), is guaranteed, if the pressure drop in inlet pipeline doesn't exceed 3% of p_{set} and simultaneously the pressure drop in outlet pipeline doesn't exceed 15% of p_{set} .

Design

The safety valve Series PV 63 is manufactured in pressure ranges, sizes and executions according to following tables. The tables contain the detail information about the dimensions, weight, range of set pressure and material of main parts too.

For PN16 and PN40, the valve's body is casted, the inlet nozzle is it's integrated part. The seat ring is tightly pressed

into it. For PN63 and PN100, the casted body is provided with forged inlet nozzle with integrated seat. The flange's dimensions are according to EN 1092-1, respectively to EN 1092-2.

The flat disc is equipped with lifting bell, which is exposed to pressure of medium when the valve starts to open. The opening force is increased by this way, the result is quick opening of valve.

The spring, which causes the closing/sealing force, is designed for specific range of set pressures, the fine setting is made through adjusting screw.

The valve is equipped with lever, which serves for manual valve opening/test of function under the normal operating conditions of protected equipment.

Thanks to closed bonnet, the valve can be executed as gas-tight too.

Installation instructions

- 1) The valve should be installed with spindle in vertical position
- 2) Outlet line must be inclined, the drainage hole must be provided in the lowest point
- 3) On demand, the valve's body can be manufactured with drainage hole

Ordering

The full type number must be given when ordering the valve. Demand for other flanges than according to EN 1092, for supporting brackets with drilled fixing holes or for position sensor must be placed in order too. The counter flanges, gaskets and bolts/nuts can be provided on demand too.

Basic dimensions, weight and range of set pressure

PV 6301, PN 16, DN 20 x 32 to 150 x 250


Size DN	Seat		Inlet flange	Outlet flange	Centre to face		Installation height	Drainage ⁶⁾	Set pressure (p_{set})				Weight cca. m
	dia	area	PN16	PN10	S_1	S_2			min. ¹⁾	min. ²⁾	max.	max. ⁹⁾	
$d_1 \times d_2$	d_0	A_0	D_1	D_2	S_1	S_2	H	E	[barg]	[barg]	[barg]	[barg]	[kg]
	[mm]	[mm ²]	[mm]	[mm]	[mm]	[mm]	[mm]	závit					
20 x 32	16	201	105	140	85	95	345	G $\frac{1}{4}$	0,45	1,0	16,0	10,0	7,5
25 x 40	20	314	115	150	95	105	395	G $\frac{1}{4}$	0,45	1,0	16,0	10,0	9
32 x 50	25	491	140	165	100	110	420	G $\frac{1}{4}$	0,45	1,0	16,0	10,0	13
40 x 65	32	804	150	185	115	130	495	G $\frac{1}{4}$	0,45	1,0	16,0	10,0	19
50 x 80	40	1257	165	200	125	145	550	G $\frac{1}{4}$	0,45	1,0	16,0	10,0	25
65 x 100	50	1964	185	220	140	150	660	G $\frac{3}{8}$	0,45	1,0	16,0	10,0	37
80 x 125	63	3117	200	250	155	170	710	G $\frac{3}{8}$	0,45	1,0	16,0	10,0	52
100 x 150	77	4657	220	285	175	180	810	G $\frac{3}{8}$	0,45	1,0	16,0	10,0	77
125 x 200 ¹⁾	93	6793	250	340	215	220	860	G $\frac{3}{8}$	0,45	---	12,5	---	90
150 x 250 ¹⁾	110	9503	285	395	225	245	990	G $\frac{3}{8}$	0,45	---	10,0	---	140

Material of safety valve PV 6301 main parts

Part	Description	Material
1	Body	EN-GJL-250
2	Seat	X39CrMo17-1
3	Disc ¹⁾	X39CrMo17-1
3	Disc ²⁾	X6CrNiTi18-10+EPDM/NBR
4	Bell	EN-GJS-400-15
5	Bonnet	EN-GJS-400-15
6	Spindle	X20Cr13
7	Cap	EN-GJS-400-15
8	Spring	51CrV4

Notes:

- 1) for metal/metal seat only
- 2) for soft seat only
- 6) on demand only
- 9) for diaphragm only

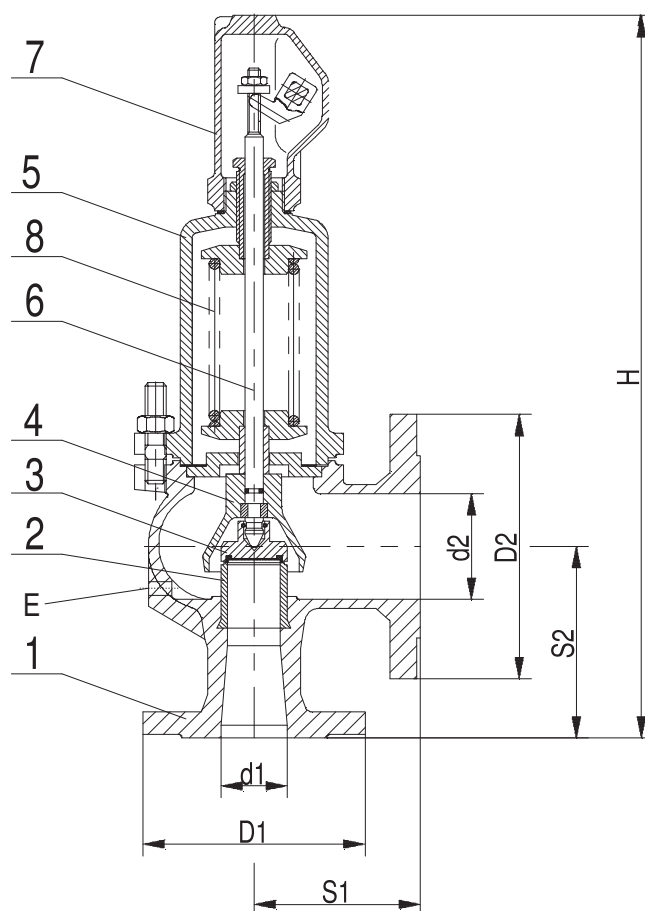

Basic dimensions, weight and range of set pressure

PV 6302, PN 40, DN 20 x 32 to 150 x 250 (body material GP240GH)

PV 6302, PN 40, DN 20 x 32 to 100 x 150 (body material EN-GJS-400-18 or GX5CrNi19-10)

Size DN	Seat		Inlet flange		Output flange		Centre to face		Intallation height		Drain- age ⁶⁾	Set pressure (p_{set})					Weight cca.	
	dia	area	PN40	PN10			without spacer	with spacer						m	m ⁷⁾			
	d_0	A_0	D_1	D_2	S_1	S_2	H		E	min. ¹⁾		min. ²⁾	min. ³⁾	max.	max. ⁹⁾	m	m ⁷⁾	
$d_1 \times d_2$	[mm]	[mm ²]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	thread	[barg]	[barg]	[barg]	[barg]	[barg]	[kg]	[kg]		
20 x 32	16	201	105	140	85	95	345	405	G $\frac{1}{4}$	0,45	1,0	0,5	40,0	10,0	8	7,5		
25 x 40	20	314	115	150	95	105	395	465	G $\frac{1}{4}$	0,45	1,0	0,5	40,0	10,0	10	9		
32 x 50	25	491	140	165	100	110	420	495	G $\frac{1}{4}$	0,45	1,0	0,5	40,0	10,0	14	13		
40 x 65	32	804	150	185	115	130	495	585	G $\frac{1}{4}$	0,45	1,0	0,5	32,0	10,0	20	19		
50 x 80	40	1257	165	200	125	145	550	655	G $\frac{1}{4}$	0,45	1,0	0,5	32,0	10,0	27	25		
65 x 100	50	1964	185	220	140	150	660	770	G $\frac{3}{8}$	0,45	1,0	0,5	32,0	10,0	39	37		
80 x 125	63	3117	200	250	155	170	710	840	G $\frac{3}{8}$	0,45	1,0	0,5	25,0	10,0	55	52		
100 x 150	77	4657	235/239 ⁷⁾	285	175	180	810	955	G $\frac{3}{8}$	0,45	1,0	0,5	20,0	10,0	82	77		
125 x 200 ¹⁾	93	6793	270	340	215	220	860	970	G $\frac{1}{2}$	0,45	---	---	12,5	---	100	---		
150 x 250 ¹⁾	110	9503	300	395	225	245	990	5)	G $\frac{1}{2}$	0,45	---	---	10,0	---	155	---		

Material of safety valve PV6302 main parts

PV 6302 (GP240GH)


Part	Description	Material
1	Body	GP240GH
2	Seat	X39CrMo17-1
3	Disc ¹⁾	X39CrMo17-1
3	Disc ²⁾	X6CrNiTi18-10+EPDM/NBR
4	Bell	EN-GJS-400-15
5	Bonnet	EN-GJS-400-15 / GP240GH
6	Spindle	X20Cr13
7	Cap	EN-GJS-400-15
8	Spring	51CrV4
9	Cooling spacer ¹⁾	C22

PV 6302 (EN-GJS-400-18)

Part	Description	Material
1	Body	EN-GJS-400-18
2	Seat	X39CrMo17-1
3	Disc ¹⁾	X39CrMo17-1
3	Disc ²⁾	X6CrNiTi18-10+EPDM/NBR
4	Bell	EN-GJS-400-15
5	Bonnet	EN-GJS-400-15
6	Spindle	X20Cr13
7	Cap	EN-GJS-400-15
8	Spring	51CrV4

PV 6302 (GX5CrNi19-10)

Part	Description	Material
1	Body	GX5CrNi19-10
2	Seat	X6CrNiTi18-10
3	Disc ¹⁾	X6CrNiTi18-10
4	Bell	GX5CrNi19-10
5	Bonnet	GX5CrNi19-10
6	Spindle	X6CrNiTi18-10
7	Cap	GX5CrNi19-10
8	Spring	X10CrNi18-8

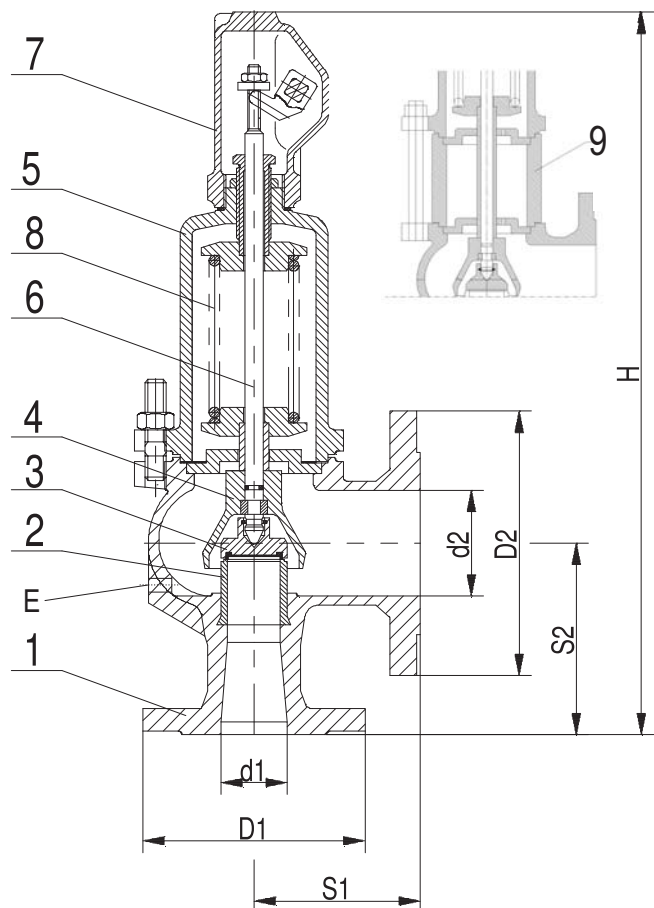

Notes:

- 1) for metal/metal seat only
- 2) for soft seat only
- 3) for stainless steel only
- 5) execution with cooling spacer on demand
- 6) on demand only
- 7) body material EN-GJS-400-18
- 9) for diaphragm only

Basic dimensions, weight and range of set pressure

PV 6303, PN 63, DN 20 x 32 to 400 x 500


Size DN ²⁾	Seat		Inlet flange		Outlet flange		Centre to face		Installation height		Drainage ⁶⁾	Set pressure (P _{set})		Weight cca. m
	dia	area	PN25/40	PN63	PN10	PN25/40	S ₁	S ₂	wo cooling spacer	with cooling spacer		E thread	min.	
	d ₀	A ₀	D ₁	D ₁	D ₂	D ₂	[mm]	[mm]	[mm]	[mm]	[mm]		[barg]	[barg]
20 x 32	16	201	105 ⁸⁾	130	---	140	95	110	400	470	G ¹ / ₄	38	62	12
25 x 40	20	314	115 ⁸⁾	140	---	150	100	110	420	495	G ¹ / ₄	38	62	14
32 x 50	25	491	140 ⁸⁾	155	---	165	110	115	475	560	G ¹ / ₄	38	62	20
40 x 65	32	804	150 ⁸⁾	170	---	185	130	140	535	640	G ¹ / ₄	30	50	28
50 x 80	40	1257	165 ⁸⁾	180	---	200	145	150	650	760	G ¹ / ₄	30	50	40
65 x 100	50	1964	185 ⁸⁾	205	---	235	155	160	685	815	G ³ / ₈	30	50	50
80 x 125	63	3117	200 ⁸⁾	215	---	270	190	180	790	935	G ³ / ₈	23	40	80
100 x 150	77	4657	235 ⁸⁾	250	---	300	210	200	940	--- ⁵⁾	G ³ / ₈	18	32	130
125 x 200 ¹⁾	93	6793	270 ⁸⁾	295	340	360 / ---	215	220	980	--- ⁵⁾	G ¹ / ₂	12	25	150
150 x 250 ¹⁾	110	9503	300	---	405 ⁴⁾	--- / ---	225	245	1020	--- ⁵⁾	G ¹ / ₂	9,5	16	180
200 x 300 ¹⁾	155	18870	360 / ---	---	445	--- / ---	265	290	1210	--- ⁵⁾	G ³ / ₄	0,45	10	300
300 x 400 ¹⁾	220	38010	485 / ---	---	565	--- / ---	335	370	1480	--- ⁵⁾	G ³ / ₄	0,3	7	470
400 x 500 ¹⁾	280	61575	620 / ---	---	670	--- / ---	375	415	1650	--- ⁵⁾	G ³ / ₄	0,25	4,5	550

Material of safety valve PV 6303 main parts

Part	Description	Material
1	Body	GP240GH
2	Inlet nozzle	13CrMo4-5, od DN125 GP240GH
3	Disc ¹⁾	X39CrMo17-1, od DN200 GX5CrNi19-10
3	Disc ²⁾	X6CrNiTi18-10+EPDM/NBR
4	Bell	EN-GJS-400-15, od DN200 GP240GH
5	Bonnet	GP240GH
6	Spindle	X20Cr13
7	Cap	EN-GJS-400-15, od DN200 GP240GH
8	Spring	51CrV4
9	Cooling spacer ¹⁾	C22

Notes:

- 1) for metal/metal seat only
- 2) for soft seat only
- 4) outlet flange with PN16 holes
- 5) execution with cooling spacer on demand
- 6) on demand only
- 8) on demand, if allowed regarding to set pressure

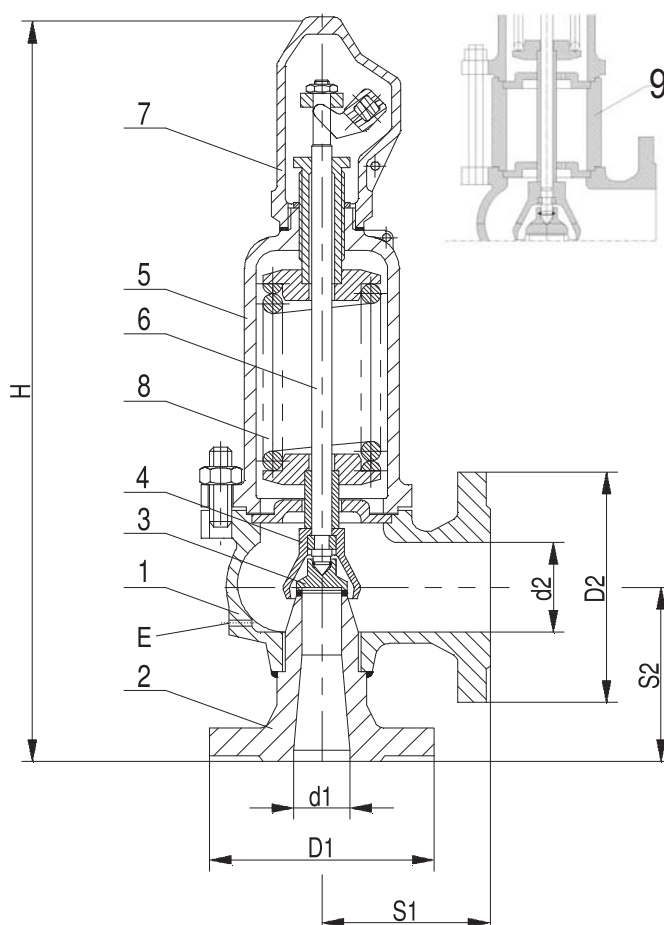

Basic dimensions, weight and range of set pressure

PV 6304, PN 100, DN 25 x 40 to 100 x 150


Size DN	Seat		Inlet flange		Outlet flange	Centre to face		Installation height		Drainage ⁶⁾	Set pressure (p_{set})		Weight cca. m
	dia	area	PN63	PN100	PN40	S_1	S_2	wo cooling spacer	with cooling spacer		min.	max.	
$d_1 \times d_2$	d_0 [mm]	A_0 [mm ²]	D_1 [mm]	D_1 [mm]	D_2 [mm]	[mm]	[mm]	H [mm]		E thread	[barg]	[barg]	[kg]
25 x 40	16	201	---	140	150	100	120	430	505	G $\frac{1}{4}$	60	95	15
32 x 50	20	314	---	155	165	110	125	485	570	G $\frac{1}{4}$	60	95	20
40 x 65	25	491	---	170	185	130	140	535	640	G $\frac{1}{4}$	48	95	28
50 x 80	32	804	---	195	200	145	150	650	760	G $\frac{1}{4}$	48	95	40
65 x 100	40	1257	---	220	235	155	165	685	812	G $\frac{1}{4}$	48	95	50
80 x 125	50	1964	---	230	270	190	185	795	940	G $\frac{3}{8}$	38	78	80
100 x 150	63	3117	250	---	300	210	200	940	--- ⁵⁾	G $\frac{3}{8}$	30	62	130

Material of safety valve PV 6304 main parts

Part	Description	Material
1	Body	GP240GH
2	Inlet nozzle	13CrMo4-5
3	Disc ¹⁾	X39CrMo17-1
3	Disc ²⁾	X6CrNiTi18-10+EPDM/NBR
4	Bell	EN-GJS-400-15
5	Bonnet	GP240GH
6	Spindle	X20Cr13
7	Cap	EN-GJS-400-15
8	Spring	51CrV4
9	Cooling spacer ¹⁾	C22

Notes:

- 1) for metal/metal seat only
- 2) for soft seat only
- 5) execution with cooling spacer on demand
- 6) on demand only

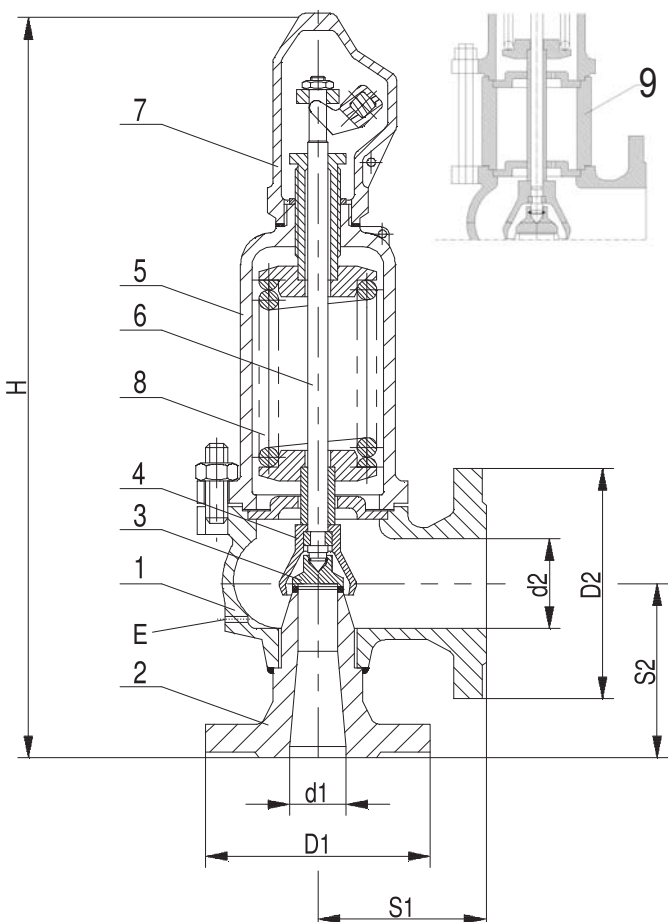


Supporting brackets

The valve is provided with supporting brackets.
The fixing holes according to following tables can be drilled into on demand.

Dimensions of supporting brackets/fixing holes for PV 6302 (PN40)

Size DN	A	B	C	L	E	d	S
	[mm]						
40 x 65	180	84	134	65	155	14	10
50 x 80	210	93	160	70	180	14	12
65 x 100	245	94	196	70	215	14	12
80 x 125	300	100	240	90	270	18	15
100 x 150	320	160	280	130	285	18	15
125 x 200	365	120	300	90	330	18	15
150 x 250	415	150	360	120	380	18	15

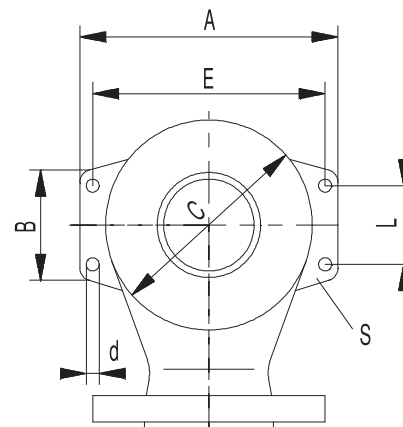

Dimensions of supporting brackets/fixing holes for PV 6303 (PN63)

Size DN	A	B	C	L	E	d	S
	[mm]						
40 x 65	186	93	140	70	156	14	12
50 x 80	210	95	165	70	180	14	12
65 x 100	250	95	205	70	220	14	12
80 x 125	295	120	240	90	260	18	15
100 x 150	320	120	265	90	285	18	15
125 x 200	365	120	300	90	330	18	15
150 x 250	415	150	360	120	380	18	15
200 x 300	510	180	450	150	470	23	20
300 x 400	695	210	600	180	655	23	20
400 x 500	800	230	715	200	760	23	20

Dimensions of supporting brackets/fixing holes for PV 6304 (PN100)


Size DN	A	B	C	L	E	d	S
	[mm]						
40 x 65	186	93	140	70	156	14	12
50 x 80	210	95	165	70	180	14	12
65 x 100	250	95	205	70	220	14	12
80 x 125	295	120	240	90	260	18	15
100 x 150	320	120	265	90	285	18	15

Accessories

The valve can be provided with CLOSE position sensor (inductive switch) on demand.
If not specified, the standard sensor has following parameters:

Working range (sensitivity):	3 mm (M8); 6 mm (M12) resp. 10 mm (M18)
Voltage:	20 ± 10 VDC
Protection:	IP67 (M8); IP68 (M12 and M18)
Temperature range:	from -25°C to +70°C
Length of connecting cable:	2000 mm

If the working condition (temperature) is over the above mentioned limits,
the valve can be provided with sensor, suitable for range from -25°C to +230°C



Value of certified coefficient of discharge K_{dr}

DN	Valve type				
	PV 630X SXX		PV 630X LXX		
	K _{dr} for steam and gases		K _{dr} for liquids		K _{dr} for steam and gases
	$\Delta p_{max} = 0,1 \text{ barg}$ $p_{set} \leq 1 \text{ barg}$ or $\Delta p_{max} = 10\%$ $1 < p_{set} \leq 1,4 \text{ barg}$	$\Delta p_{max} = 10\%$ $p_{set} > 1,4 \text{ barg}$	$\Delta p_{max} = 10\%$		$\Delta p_{max} = 10\%$
		$p_{set} \leq 6 \text{ barg}$	$p_{set} > 6 \text{ barg}$		
20 x 32 to 150 x 250	0,72	0,78	0,01	0,28	0,36
200 x 300	0,70	0,74	0,01	0,01	---
300 x 400	0,54	0,70			
400 x 500					

Value of certified coefficient of discharge K_{dr} for execution with diaphragm

DN	Valve type		
	PV 630X SDX		
	K _{dr} for steam and gases		K _{dr} for liquids
	$\Delta p_{max} = 0,1 \text{ barg}$ $p_{set} \leq 1 \text{ barg}$ or $\Delta p_{max} = 10\%$ $1 < p_{set} \leq 1,4 \text{ barg}$	$\Delta p_{max} = 10\%$ $p_{set} > 1,4 \text{ barg}$	$\Delta p_{max} = 10\%$
20 x 32 to 100 x 150	0,72	0,78	0,5

Note: Δp_{max} is maximal value of overpressure, necessary for full lift of valve

Series PV 63 valve's type number specification

		XX	XX	XX	XXX	XXX	/	XXX	-	XXX	XX	/	X	-	XXX,X	/	X
1. Valve	spring loaded full lift safety valve with closed bonnet	PV	63														
2. Nominal pressure	PN16		01														
	PN40		02														
	PN63		03														
	PN100		04														
3. Lift	full lift			S													
	limited lift			L													
4. Seat surface material	metal/metal			M													
	metal/metal + cooling spacer			W													
	¹⁾ EPDM soft seat ¹⁾			E													
	¹⁾ NBR soft seat ¹⁾			N													
	²⁾ EPDM soft seat + diaphragm ¹⁾²⁾			D													
5. Execution	standard			B													
	gas-tight			G													
6. Size	DN - inlet				XXX												
	DN - outlet					XXX											
	seat dia [mm]							XXX									
7. Connection	flange only										PP						
8. Body material	cast iron (EN-GJL-250), T _{max} 300°C												1				
	cast carbon steel (GP240GH), T _{max} 400°C												2				
	cast stainless steel (GX5CrNi19-10), T _{max} 300°C												3				
	nodular cast iron (EN-GJS-400-18), T _{max} 350°C												4				
9. Set pressure	p _{set} [barg]													XXX,X			
10. Protected medium	gas																G
	steam																S
	liquid																L

Example of order: **PV 6302 LMG 080/125-063 PP/3-010,5/L** i.e. spring loaded full lift safety valve with closed bonnet, nominal pressure PN 40, limited lift, metal/metal seat, gas-tight, size DN 80x125, seat dia 63 mm, flanged connection, body made from stainless steel (GX5CrNi19-10), set pressure pset = 10,5 barg, protected medium liquid

Maximal permissible working pressures according to EN 12516-1, respective to EN 1092-2 [barg]

Material	PN	Temperature [°C]											
		RT ¹⁾	50	100	120	150	180	200	250	300	350	375	400
Cast iron EN-GJL 250 (EN-JL-1040)	10	10,0	10,0	10,0	10,0	9,0	8,4	8,0	7,0	6,0	---	---	---
	16	16,0	16,0	16,0	16,0	14,4	13,4	12,8	11,2	9,6	---	---	---
Nodular cast iron EN-GJS-400-18 (EN-JS-1025)	10	10,0	10,0	10,0	10,0	9,7	---	9,2	8,7	8,0	7,0	---	---
	40	40,0	40,0	40,0	40,0	38,8	---	36,8	34,8	32,0	28,0	---	---
Cast carbon steel GP240GH (1.0619)	10	9,74	9,30	8,53	---	7,92	---	7,11	6,50	5,89	5,48	5,40	5,28
	25	24,4	23,2	21,3	---	19,8	---	17,8	16,2	14,7	13,7	13,5	13,2
	40	39,0	37,2	34,1	---	31,7	---	28,4	26,0	23,5	21,9	21,6	21,1
	63	61,4	58,6	53,7	---	49,9	---	44,8	40,9	37,1	34,5	34,0	33,3
Alloy steel 13CrMo4-5 (1.7335)	40	40	40	40	---	40	---	40	40	40	38	37	36
	63	63	63	63	---	63	---	63	63	63	60	58,5	56,7
	100	100	100	100	---	100	---	100	100	100	95,2	92,5	90
Stainless steel GX5CrNi19-10 (1.4308)	10	9,47	8,29	7,34	---	6,63	---	6,02	5,59	5,21	---	---	---
	40	37,9	33,2	29,4	---	26,5	---	24,1	22,4	20,8	---	---	---

¹⁾ -10°C to 50°C



LDM, spol. s r.o.
Litomyšlská 1378
560 02 Česká Třebová
Czech Republic

tel.: +420 465 502 511
fax: +420 465 533 101
E-mail: sale@ldm.cz
<http://www.ldm.cz>

LDM, spol. s r.o.
Office in Prague
Podolská 50
147 01 Praha 4

tel.: 241087360
fax: 241087192
E-mail: tomas.suchanek@ldm.cz

LDM, spol. s r.o.
Office in Ústí nad Labem
Ladova 2548/38
400 11 Ústí nad Labem
- Severní Terasa

tel.: 602708257
E-mail: tomas.kriz@ldm.cz

LDM servis, spol. s r.o.
Litomyšlská 1378
560 02 Česká Třebová
Czech Republic

tel.: +420 465 502 411-3
fax: +420 465 531 010
E-mail: servis@ldm.cz

LDM, Polska Sp. z o.o.
Modelarska 12
40 142 Katowice
Poland

tel.: +48 32 730 56 33
fax: +48 32 730 52 33
mobile: +48 601 354 999
E-mail: ldmpolska@ldm.cz

LDM Bratislava s.r.o.
Mierová 151
821 05 Bratislava
Slovakia

tel.: +421 2 43415027-8
fax: +421 2 43415029
E-mail: ldm@ldm.sk
<http://www.ldm.sk>

LDM - Bulgaria - OOD
z. k. Mladost 1
bl. 42, floor 12, app. 57
1784 Sofia
Bulgaria

tel.: +359 2 9746311
fax: +359 2 9746311
mobile: +359 888 925 766
E-mail: ldm.bg@ldmvalves.com

OOO "LDM Promarmatura"
Jubilejnyi prospekt,
dom.6a, of. 601
141400 Khimki Moscow Region
Russian Federation

tel.: +7 4957772238
fax: +7 4956662212
mobile: +7 9032254333
E-mail: inforus@ldmvalves.com

TOO "LDM"
Lobody 46/2
Office No. 4
100008 Karaganda
Kazakhstan

tel.: +7 7212 566 936
fax: +7 7212 566 936
mobile: +7 701 738 36 79
E-mail: sale@ldm.kz
<http://www.ldm.kz>

LDM Armaturen GmbH
Wupperweg 21
D-51789 Lindlar
Germany

tel.: +49 2266 440333
fax: +49 2266 440372
mobile: +49 177 2960469
E-mail: ldmarmaturen@ldmvalves.com
<http://www.ldmvalves.com>

Your partner